

Semi-Automatic Stretch Wrapper


LP ROTOPLAT

**SEMI AUTOMATIC
STRETCH WRAPPER**



The operator can easily access from every side and load the machine with hand pallet truck via ramp or using a forklift truck.

- SPACE SAVING: REDUCED HEIGHT AND BASE SAVES 60% SPACE – FROM 3 IN. (77MM) TO 1.18 IN. (30MM).**
- SAVE SPACE THANKS TO THE REDUCED DIMENSIONS OF THE NEW RAMPS.**
- GREAT RELIABILITY: NEW ROTATION TRANSMISSION SYSTEM WITHOUT CHAIN AND ROBOPAC PATENTED BEARING.**
- REDUCED HEIGHT: ONLY 1.18 IN. (30MM) PREVENTS FREQUENT ACCIDENTAL BUMPS WITH THE FORKS OF THE FORKLIFT TRUCK FOR EASY LOADING.**
- 2,600 LBS. MAX WEIGHT LIMIT PER LOAD**

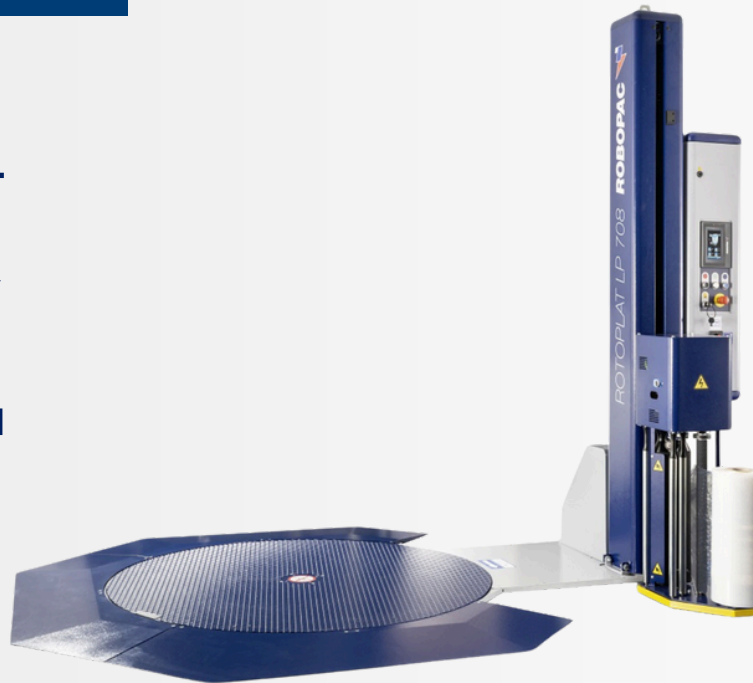

ROBOPAC
USA

PERFORMANCE FEATURES:


CUBE TECHNOLOGY

Deliver the exact right amount of film at the exactly the right position with exactly the right containment force. Reduces film costs 30-55%. Improves load containment. Reduces product damage by 40%.

PVS CARRIAGE

Power variable stretch system controlled by two motors. Stretch ratio adjustable from panel board from 100-400%. Force to the load controlled by patented electronic device and adjustable from panel board.

LP ROTOPLAT SPEC SHEET



Load Capacity:

- Turntable Size:
65" Diameter
- Maximum Load Height:
87" (up to 122" optional)
- Maximum Load Weight:
2600 lbs.



Film Delivery System

- Power variable stretch (100-400%)
- Wrapping Force - Variable Electronic
- Standard Film Width - 20" (30" option)



Performance Criteria

- Production Speed:
Up to 40 LPH
- Turntable Speed:
5 - 12 RPM
- Turntable Drive:
1 HP VAC



Utility Requirements

- 120V, 12 amps, 60 Hz, 1 PH
- NEMA 12 Enclosure:
Standard



Safety Features

- Roll Carriage Safety Stop
- CE Compliant; Anti-fall device

ROBOPACUSA.COM

INFO.US@ROBOPAC.COM

